



Do not install your tent when the car is on the slope.


The tent can only be installed when the car engine is turned off and the exhaust gas is not discharged.

Do not start the car engine while the tent is being assembled.


Please pull the handbrake when the car parked.

Please keep the tent away from fire sources, and do not make inflammable and explosive items and equipment in the tent.


Do not smoke inside the tent.



Storage bag for tent




inner tent+ tent fly



Storage bag for rods



Support rods



Fiber rods



Storage bag for nails




nails




Wind ropes




Fixing band for vehicle




Tent roof



Fixing band for tent




Installation manual

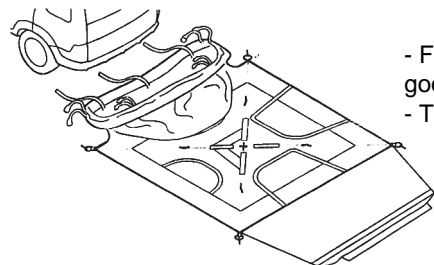


- Find a flat ground and clean all the sharp goods
- Tiled the tend on the ground.

Step-1

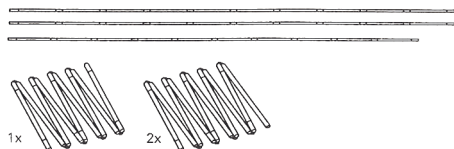


Prepare the fiber rods.

Step-2

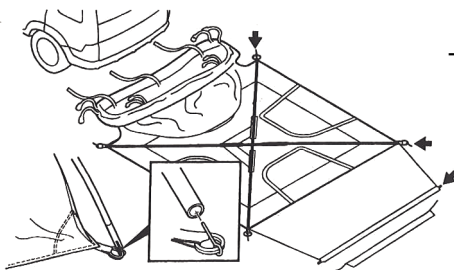


- Insert the longer rod through hole .
- Insert the shorter rod through hole .
- Use ground nail to fix the tent through after the tent is propped up.

Step-3

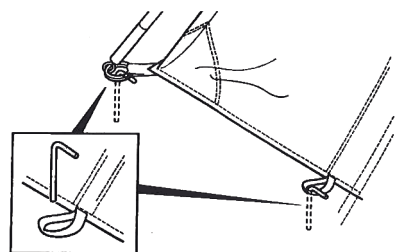


- Tighten the bottom of the tent with ground nails

Step-4

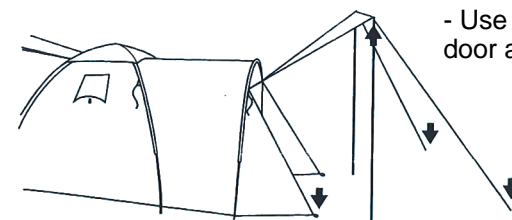

- Use 2 rods to support the entrance door and fix the ground nails.

Step-5

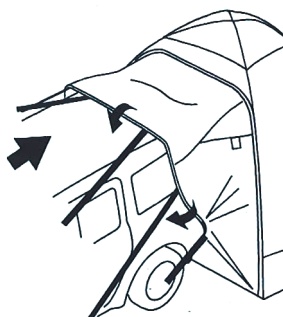

To drive the car backward to close the tent.
To link the tent with the car with the possible fixing point on the car, such as wheel hub, door handles etc.

Step-6

- Tighten the roof with windproof rope.



Step-7